



Metal protective mesh cover


PART NUMBER CODE

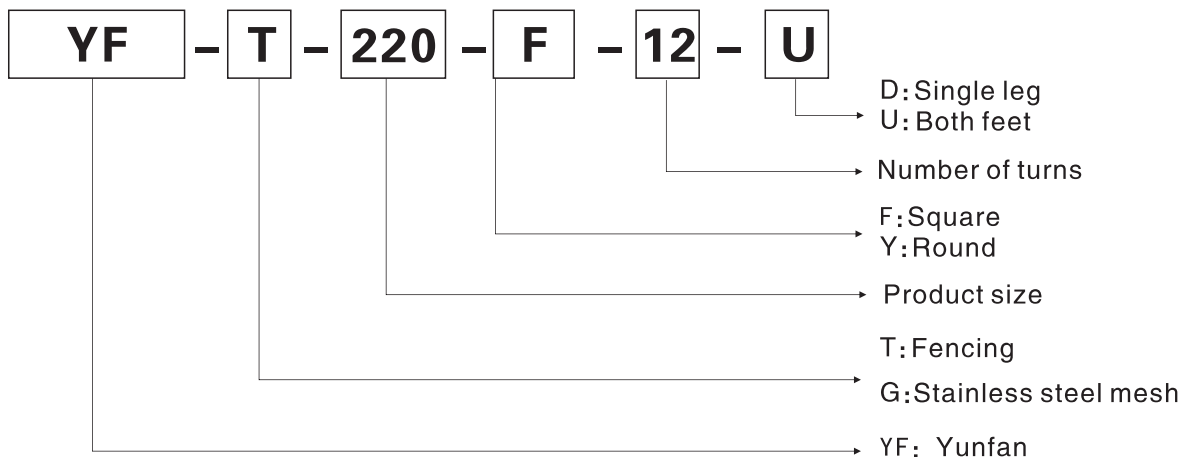

YF-T-40-2

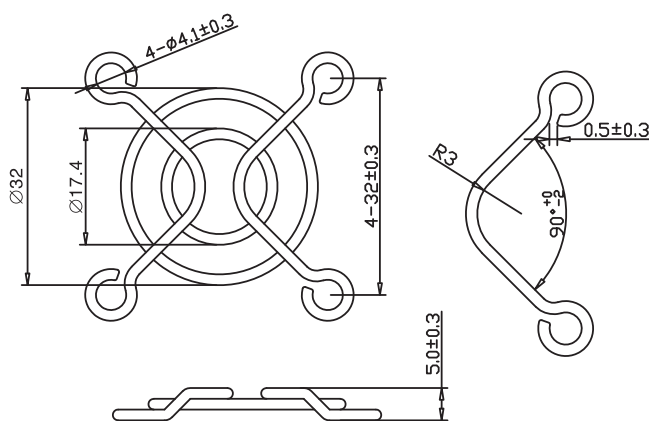


YF-T-50-3

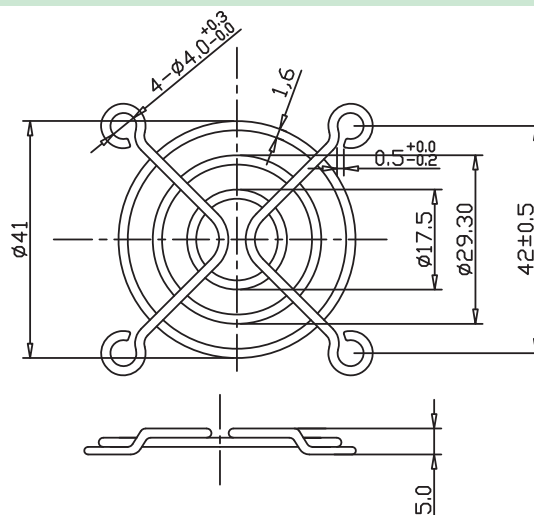


Metal protective mesh cover


YF-T-60-4

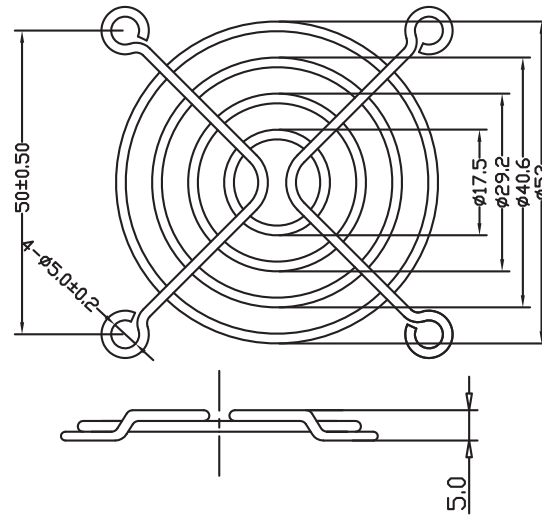

YF-T-70-5


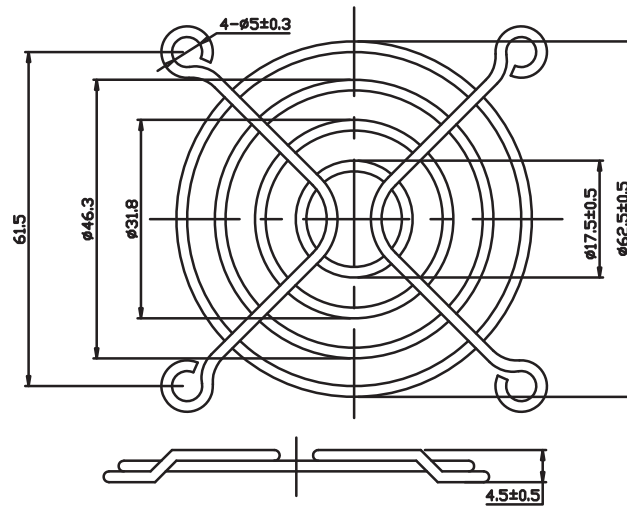


YF-T-80-5


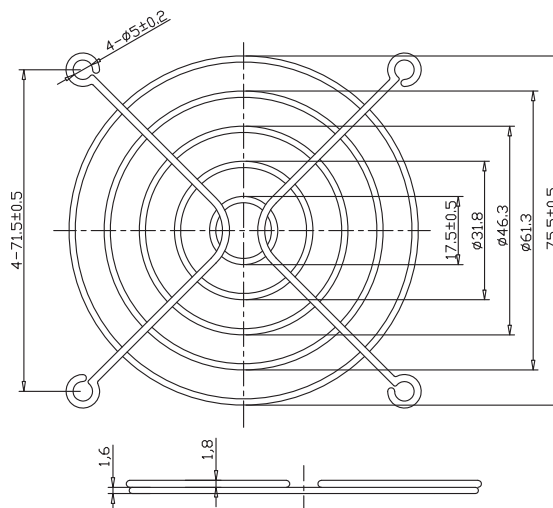






YF-T-90-5

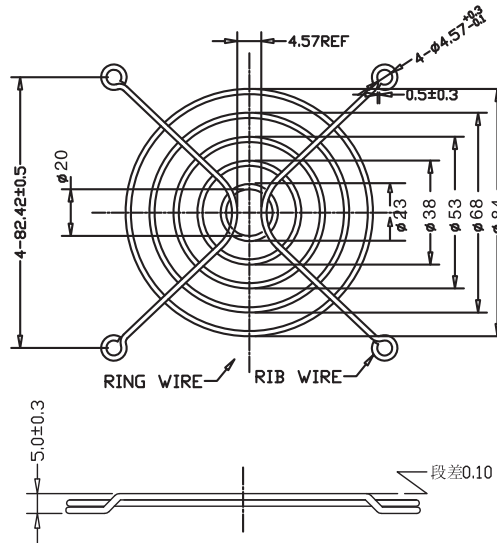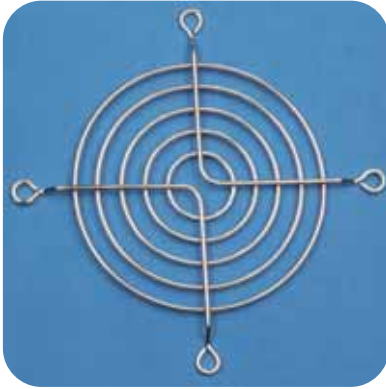



YF-T-90-6

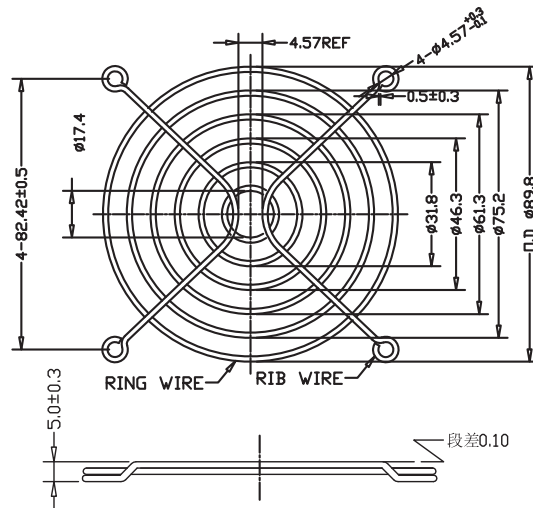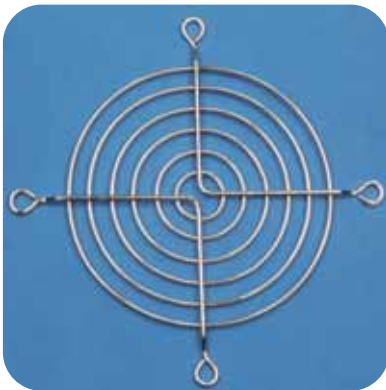



YF-T-110-7

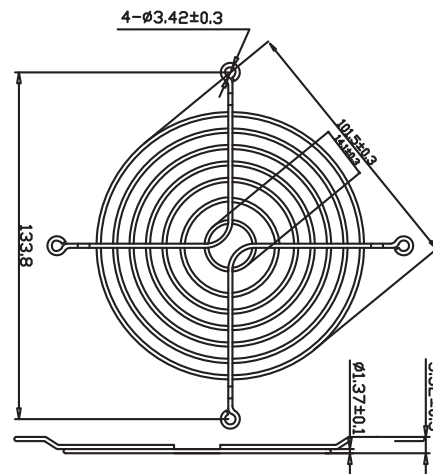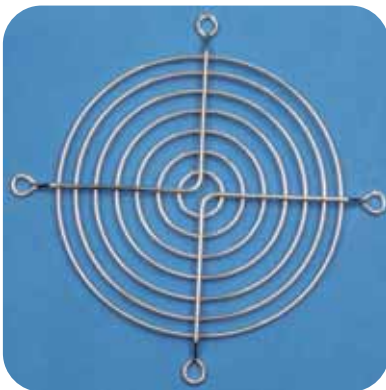



YF-T-120-7Q

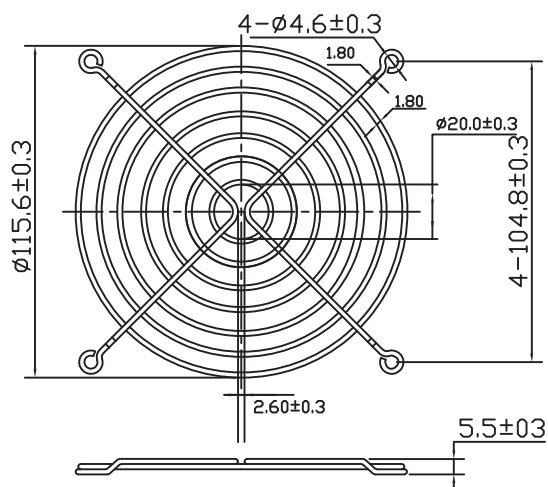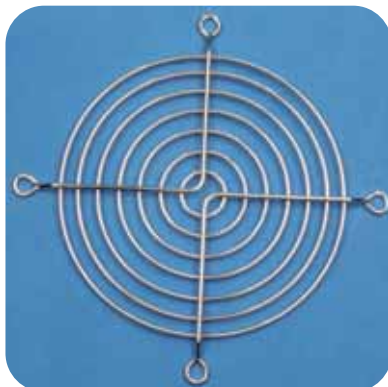

YF-T-120-8

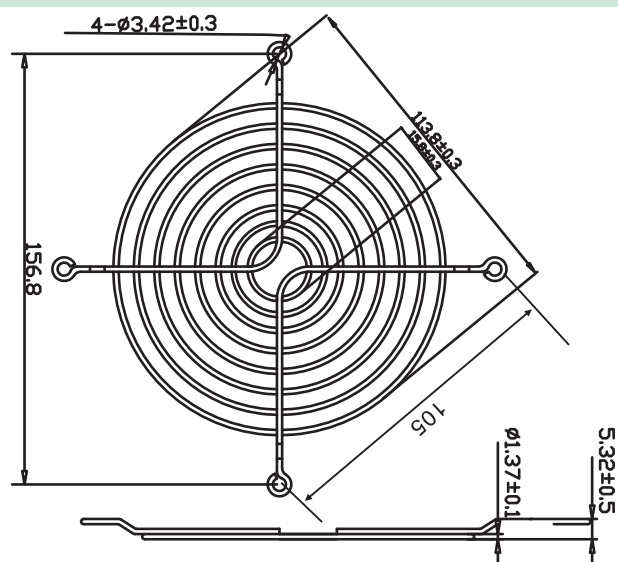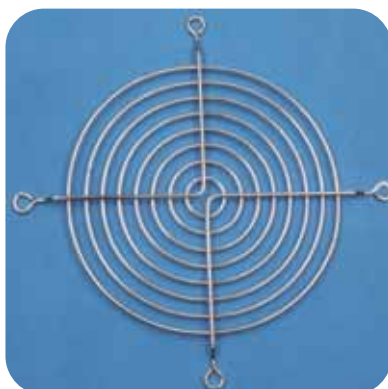

YF-T-120-8U

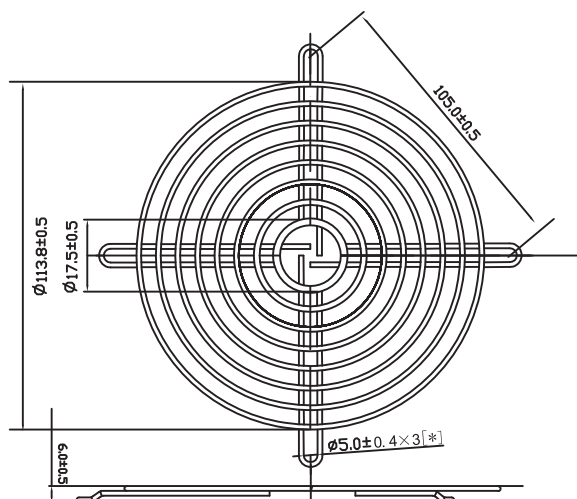
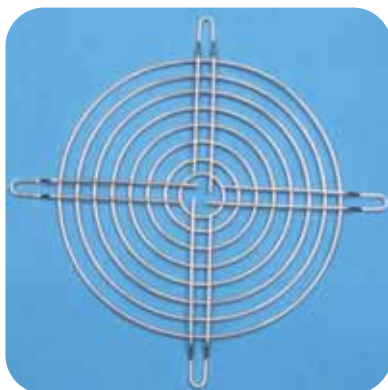





YUNFANPOWER

Metal protective mesh cover



YF-T-125-7U (可配13538、125FZY)

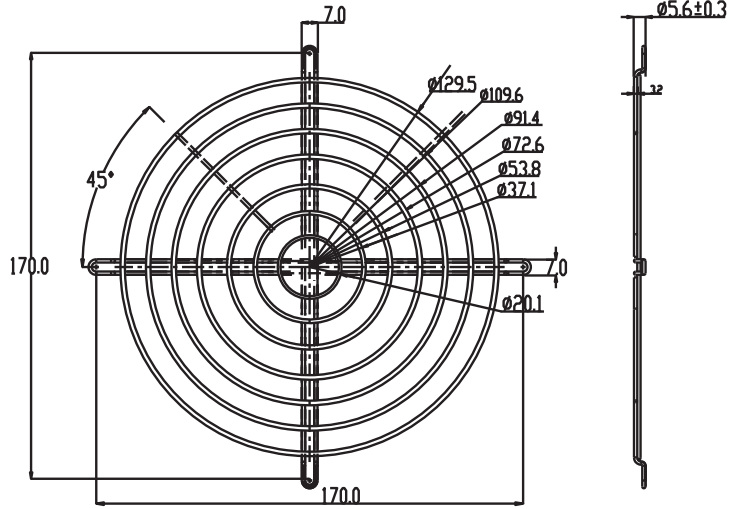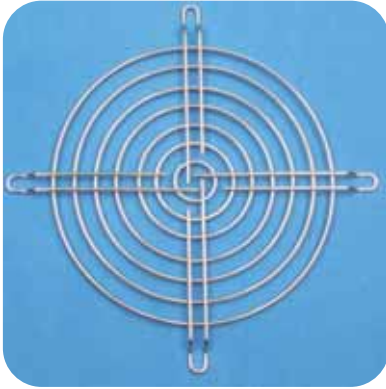

YF-T-140-D-8


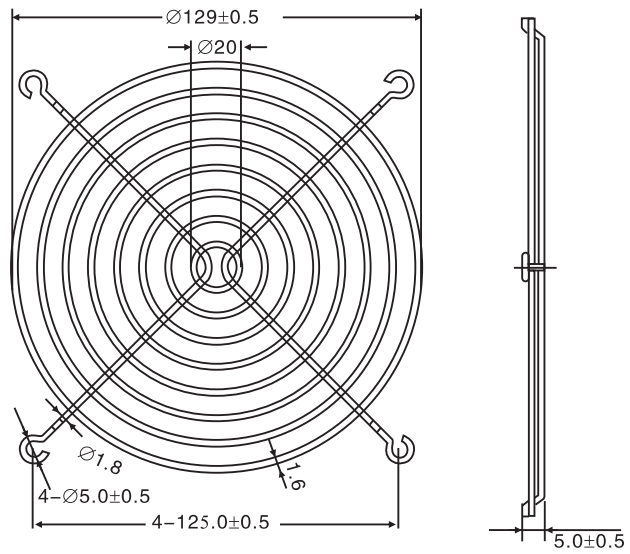


YF-T-145/2-8(可配145FZY、17055、17251)

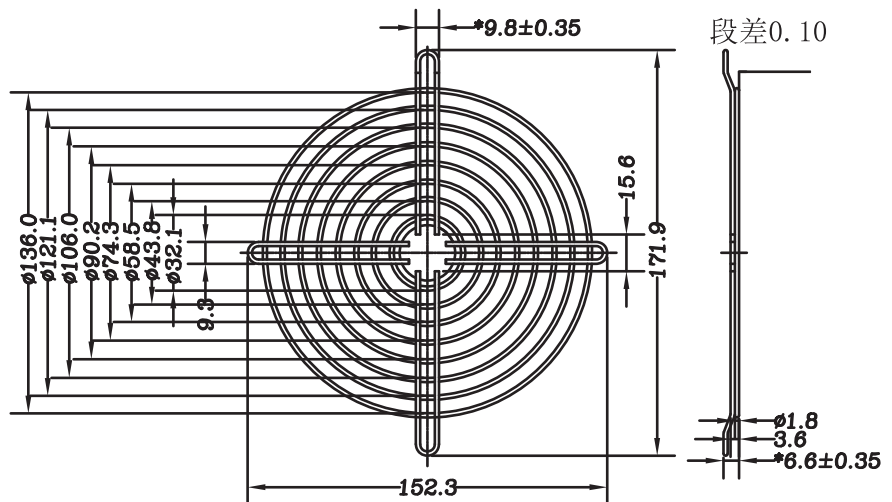
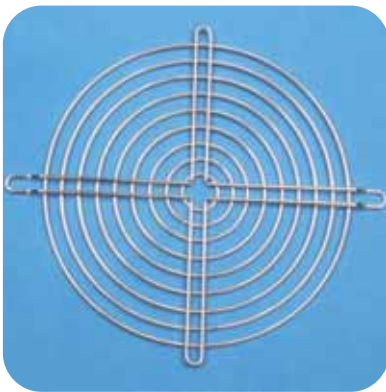


Metal protective mesh cover



YF-T-145/4-8(配17050全圆风机)

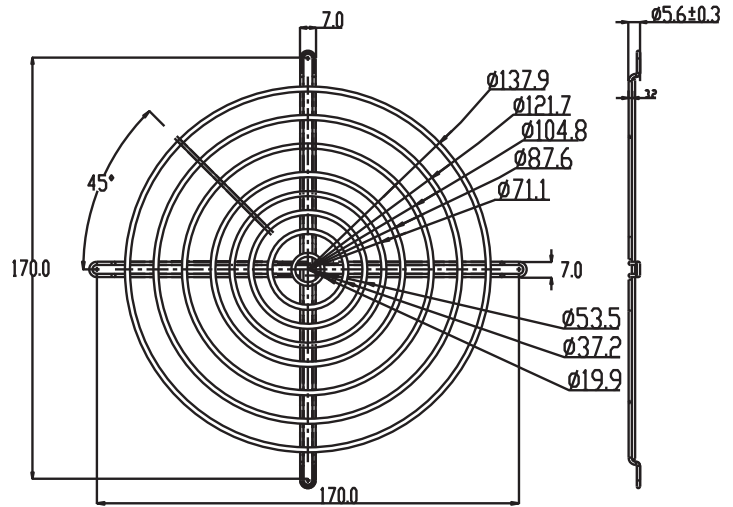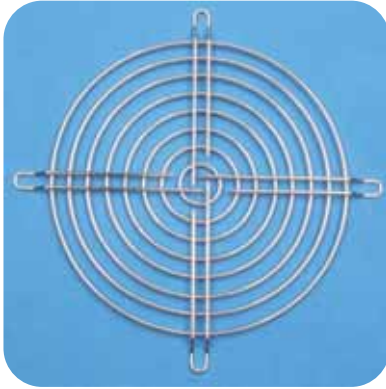

YF-T-150-D(15050专用网)

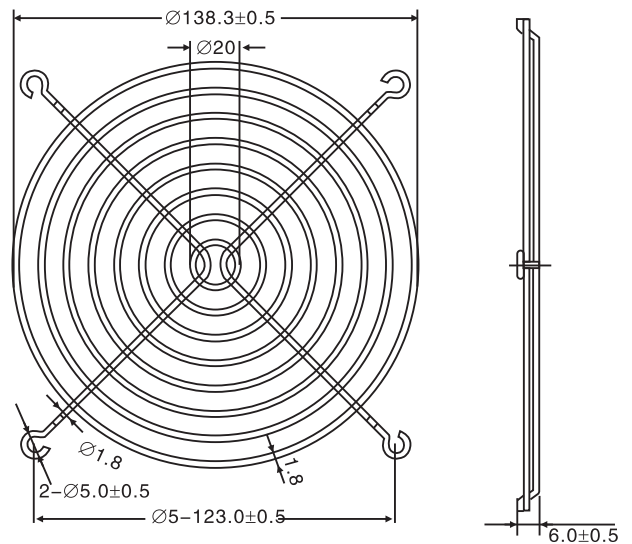
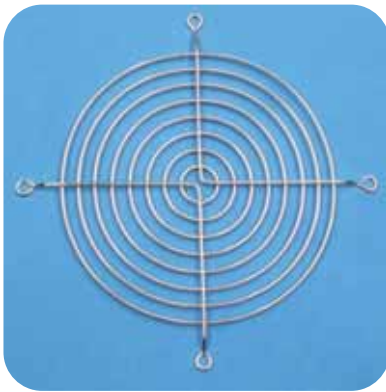


YF-T-150Y-9(配17251)

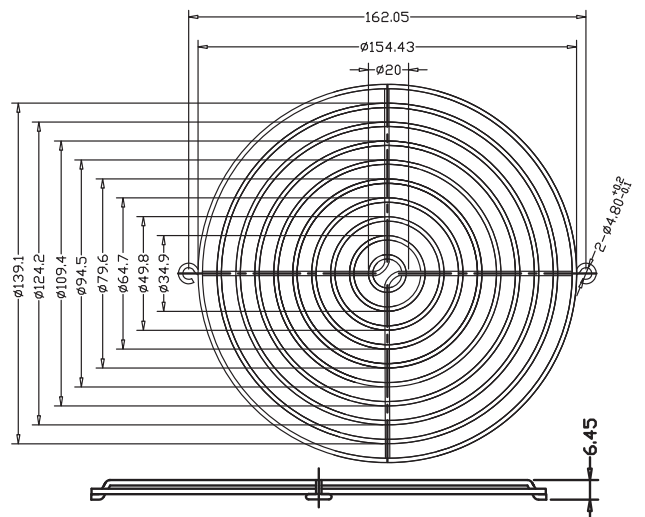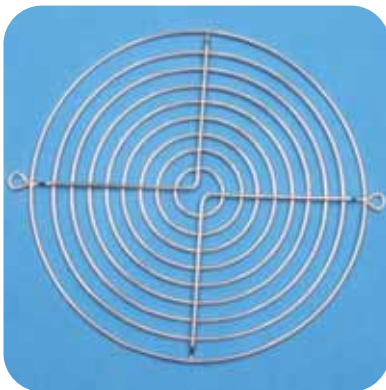





YF-T-150-8U(15050专用网)

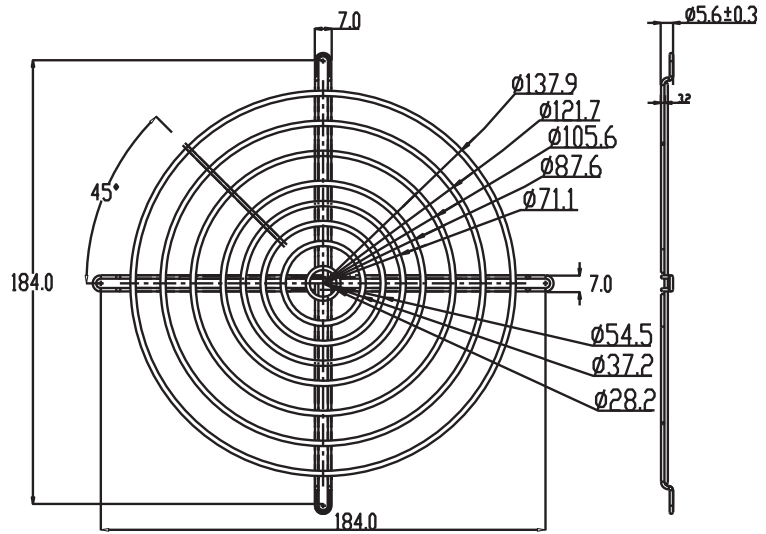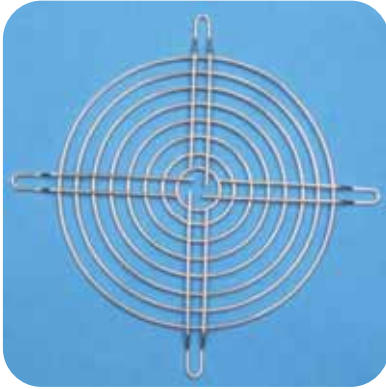

YF-T-160-9U(16055专用网)

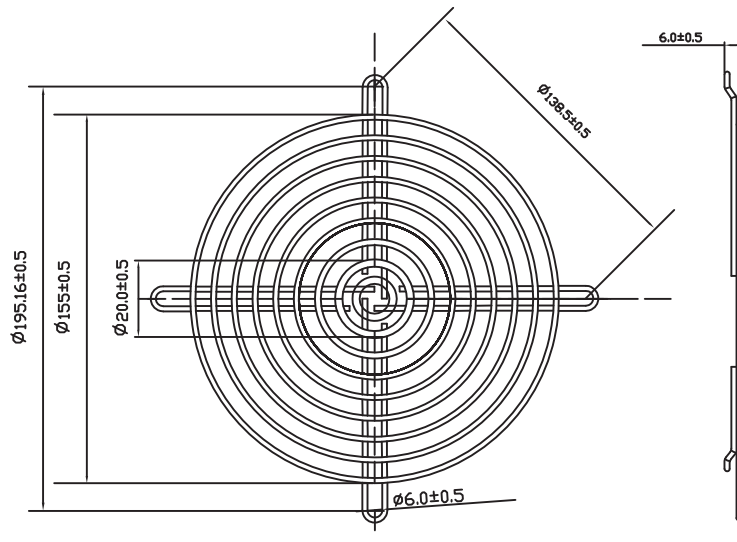


YF-T-170-V-10(开口)(17251专用网 出口版)

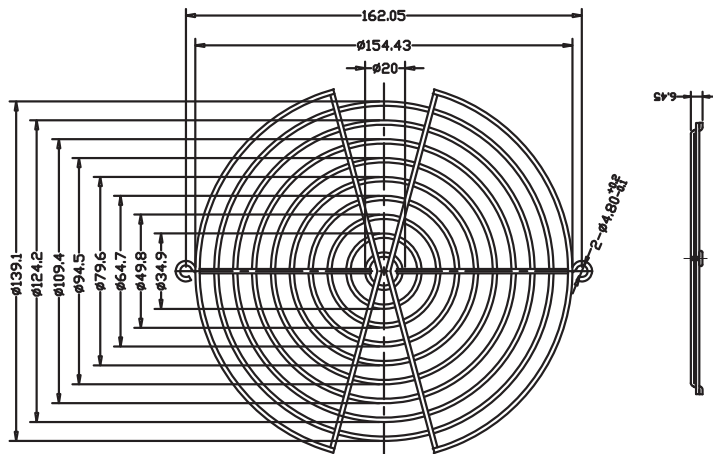


Metal protective mesh cover


YF-T-170-V-10(17251专用网 出口版)

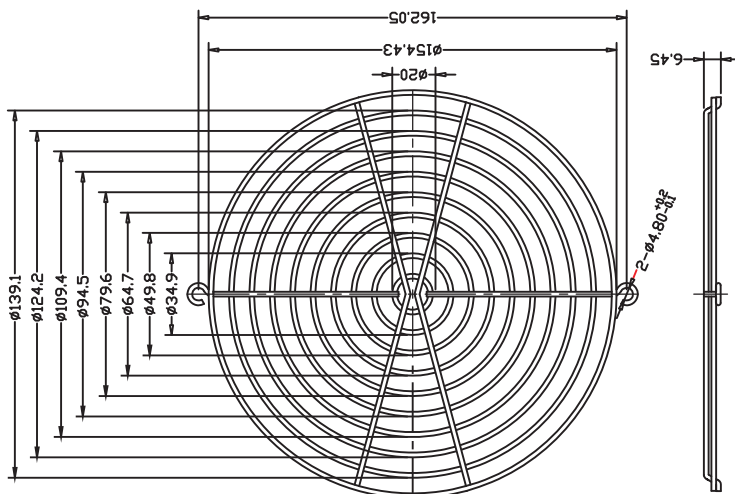

YF-T-180-10U

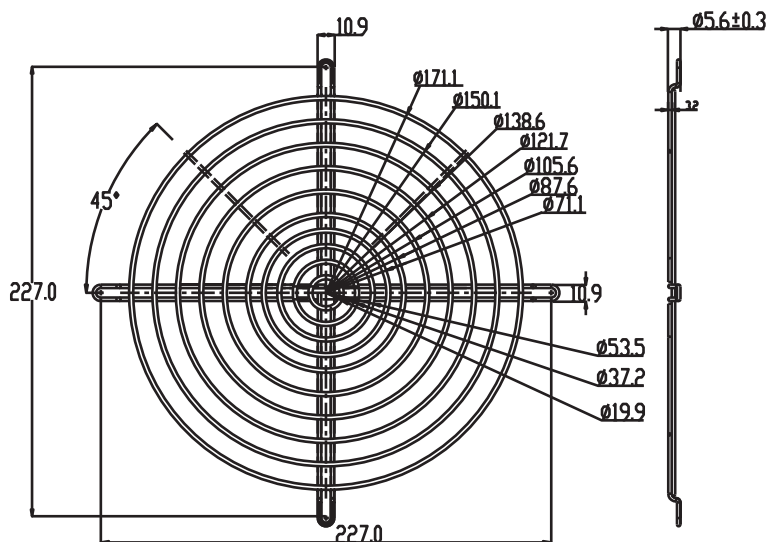

YF-T-200-F-10U

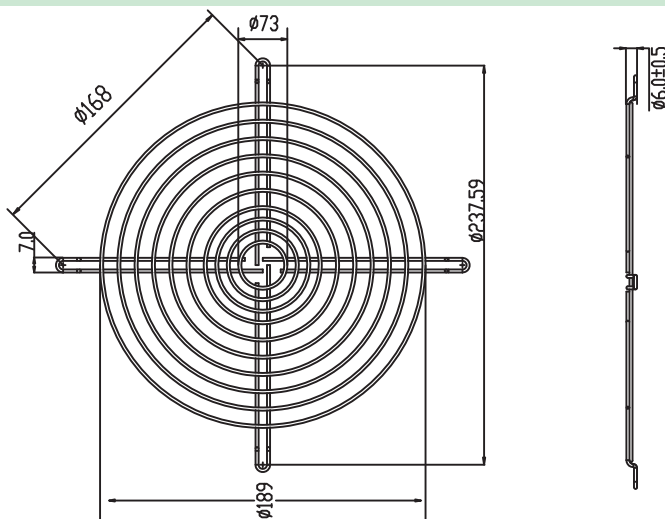






YUNFANPOWER

Metal protective mesh cover



YF-T-200-F-12U(配20060)

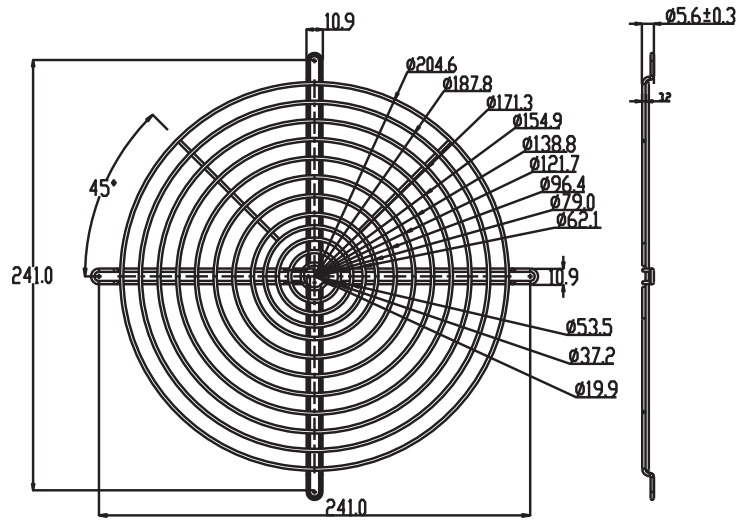

YF-T-220-Y-11-D(22060专用网)

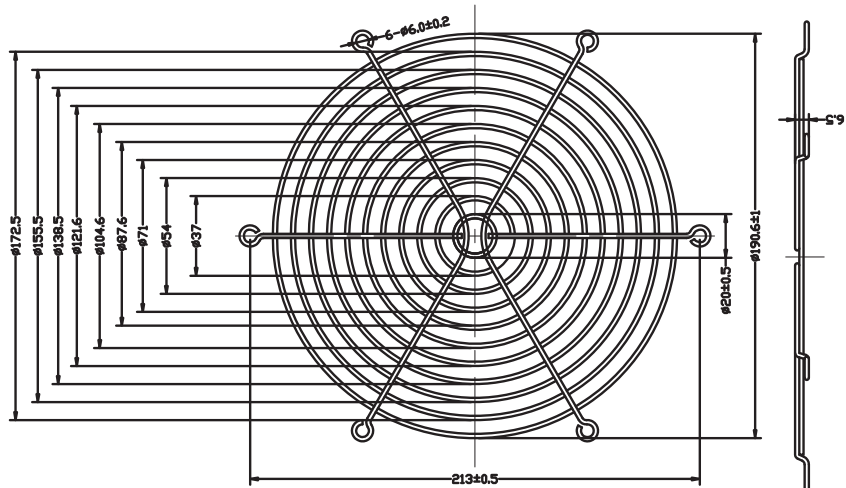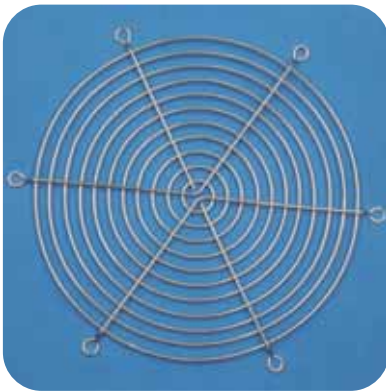


YF-T-220-10U(22060专用网)

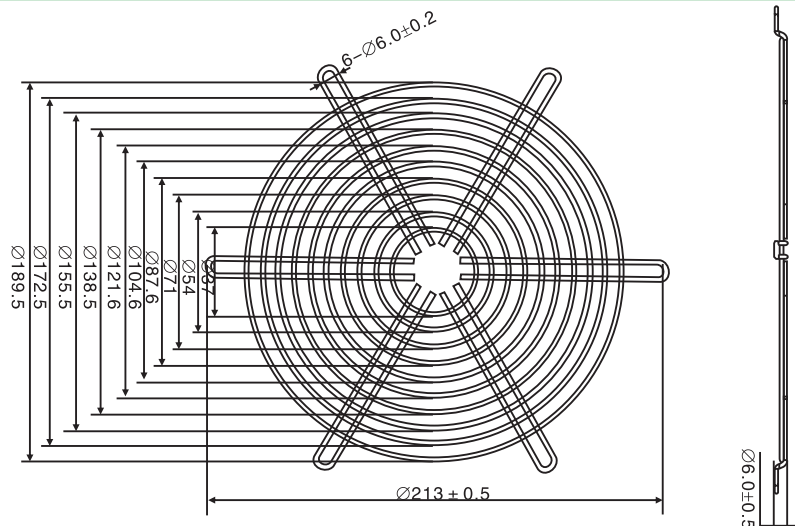
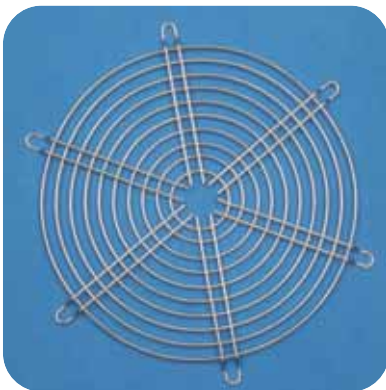


Metal protective mesh cover



YF-T-220-F-12U(22580专用网)

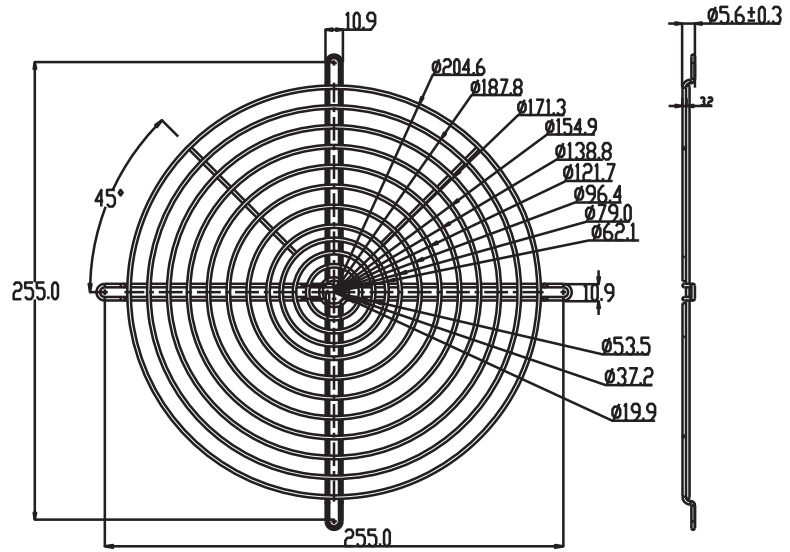

YF-T-254-13U(25489专用简易型)

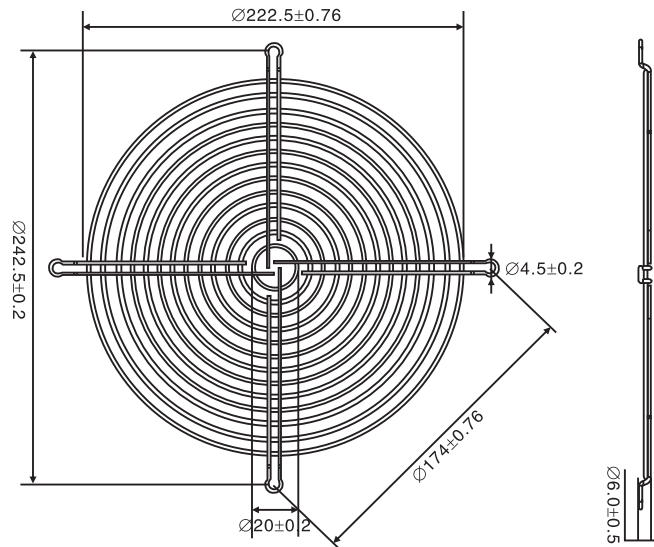
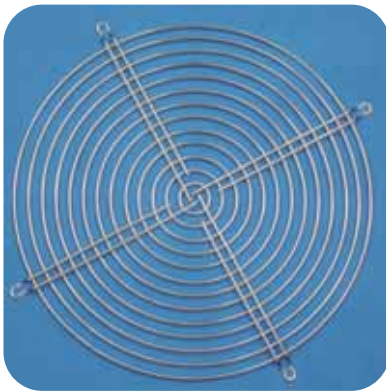


YF-T-254-9-D(25489专用网)

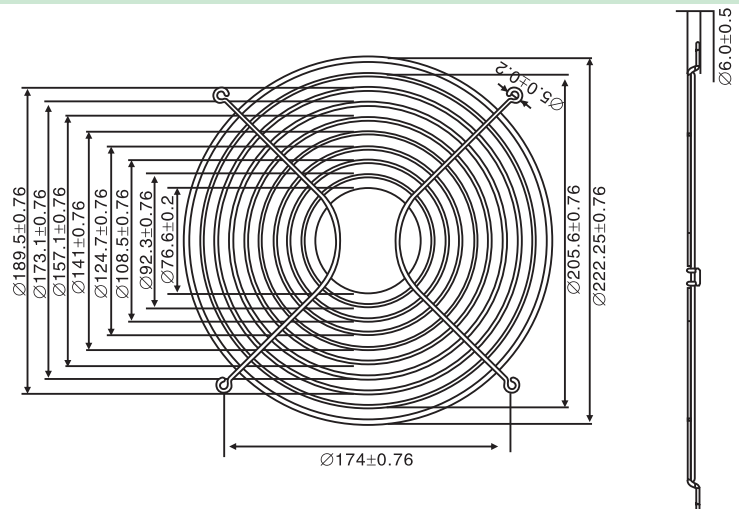
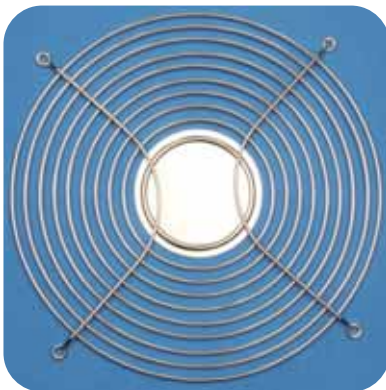






YF-T-280-15U(28080专用网)

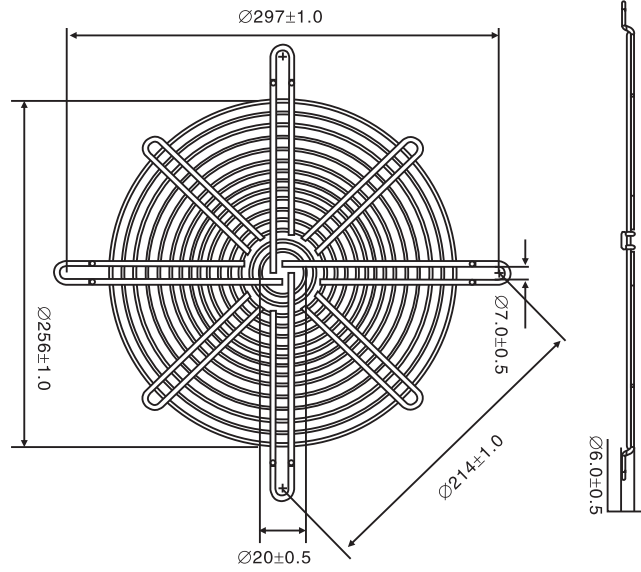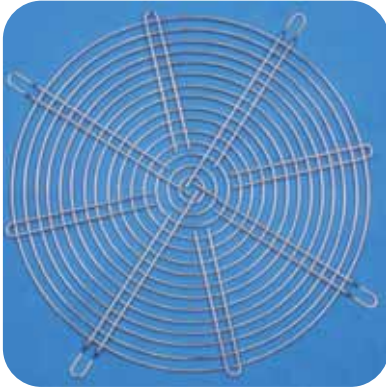

YF-T-300-19U(300FZY专用网)

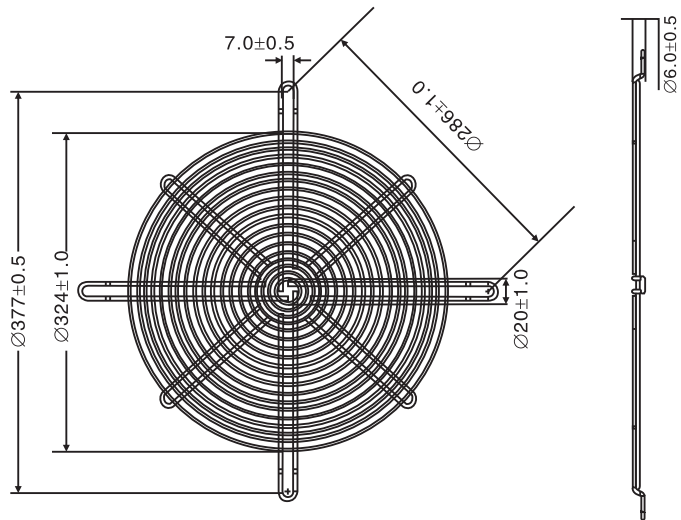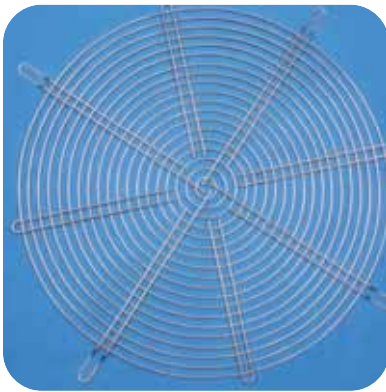


YF-T-400-23U(400FZY专用网)

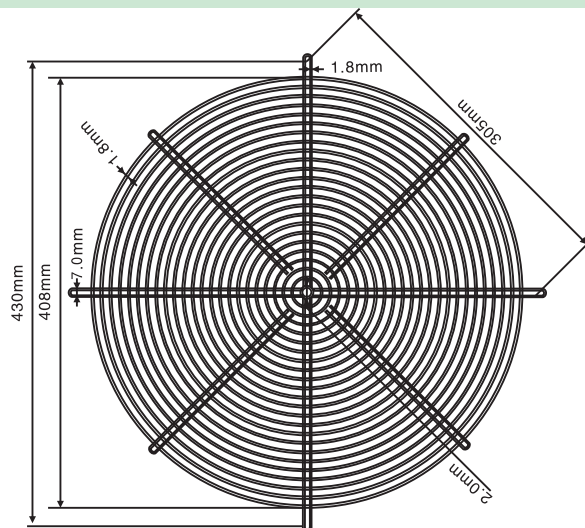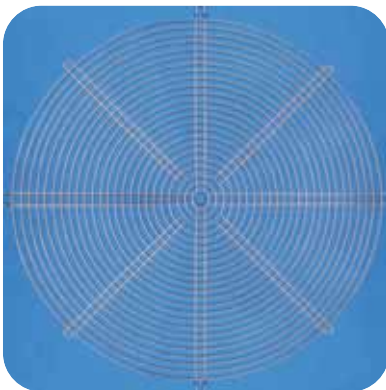


Three in one dust screen cover

PART NUMBER CODE

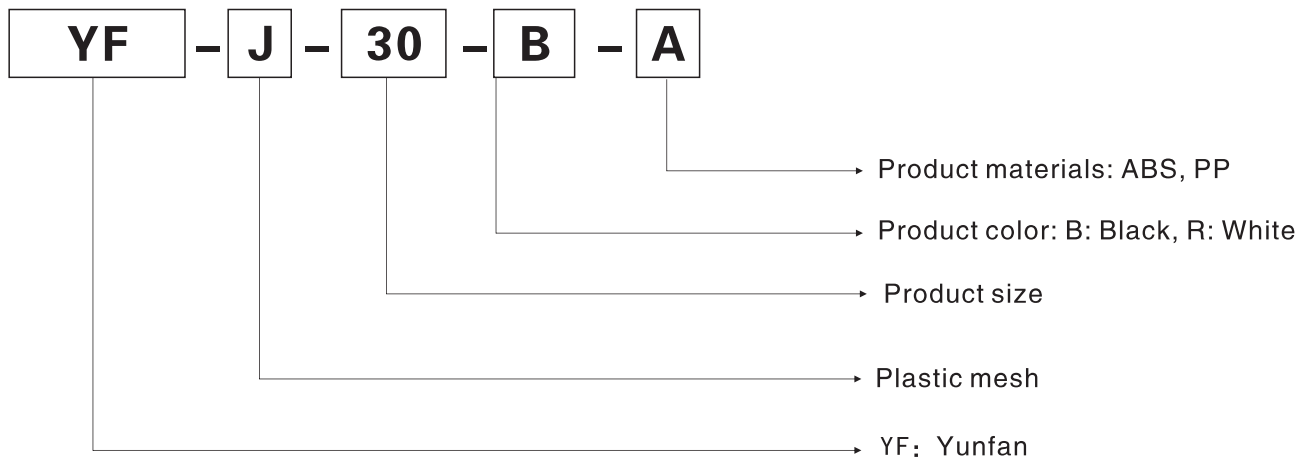

YF-J40B-A

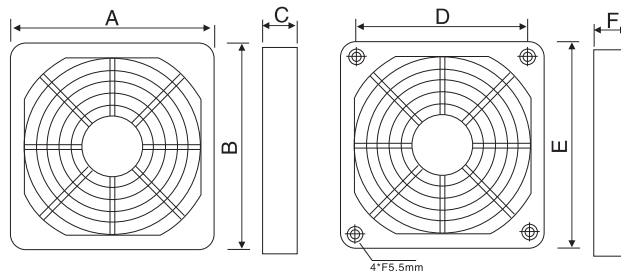


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J40B-A	43.5	43.5	7	32	40	3

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J50B-A

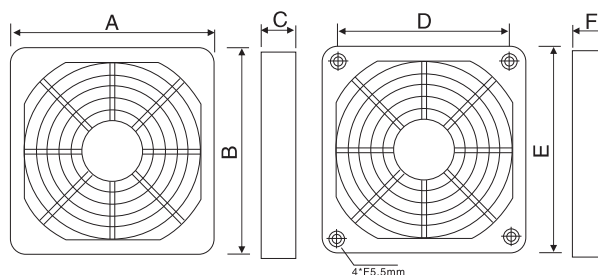


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J50B-A	54	54	7	40	50	3

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J60B-A

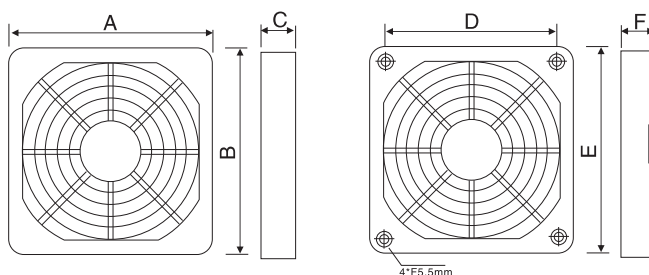


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J60B-A	64	64	7	50	60	3

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J70B-A

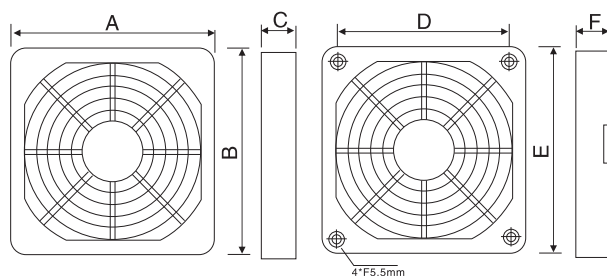


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J70B-A	74	74	10	61.5	70	3

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J80B-A

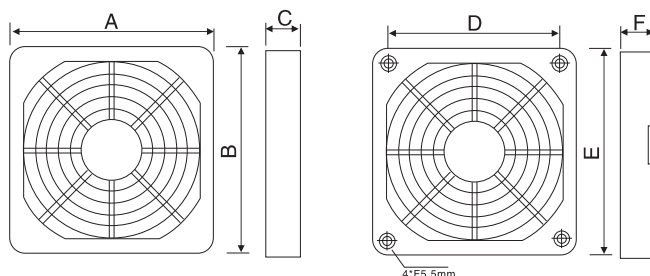

Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J80B-A	87	87	9	71.5	80	4.5


Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40



Three in one dust screen cover

YF-J92B-A

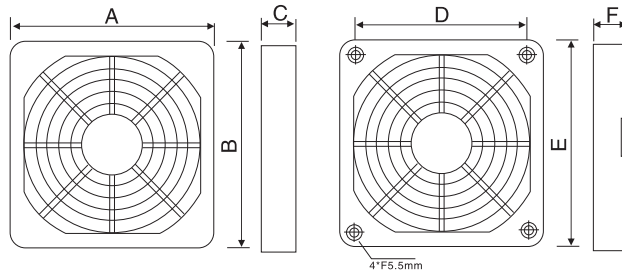


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J92B-A	96.5	96.5	10.5	92.5	92.7	4.5

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor -10°C~+55°C
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J110B-A

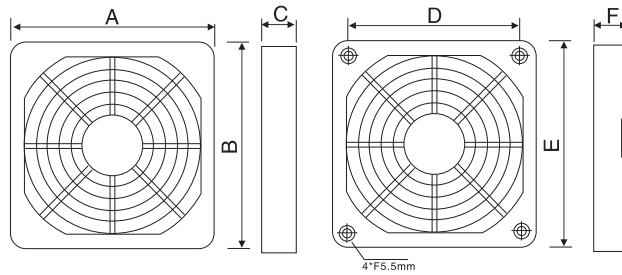


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J110B-A	115	115	10	110	110	4.5

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor -10°C~+55°C
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J120B-A

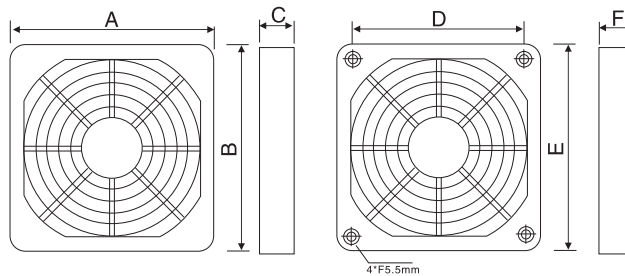


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J120B-A	125	125	10	105	120	4.5

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Color: White/Black
4. Usage range: indoor -10°C~+55°C
5. Dust removal rate: 89%
6. Protection level: IP40



YF-J120BL-A


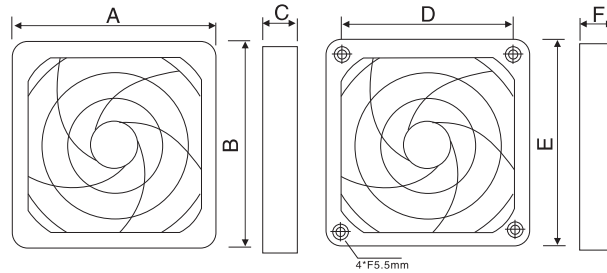


Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Color: White/Black
4. Usage range: indoor-10°C~+55°C
5. Dust removal rate: 89%
6. Protection level: IP40

Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J120BL-A	125	125	10	105	120	4.5

YF-J120-R

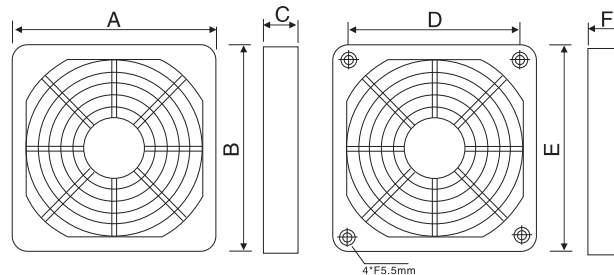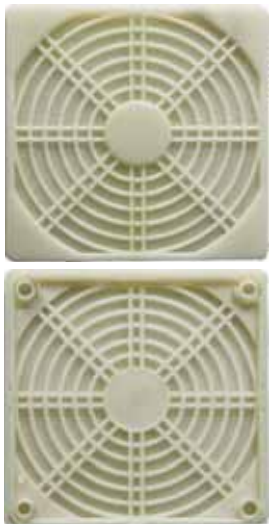


Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Color: White/Black
4. Usage range: indoor-10°C~+55°C
5. Dust removal rate: 89%
6. Protection level: IP40

Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J120-R	125	125	10	105	120	4.5

YF-J135B-A (配13538)

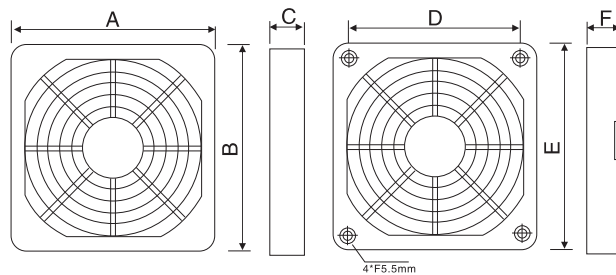


Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor -10°C~+55°C
4. Dust removal rate: 89%
5. Protection level: IP40

Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J135B-A	132	132	10	113	127	4.5

Three in one dust screen cover

YF-J150FB-A

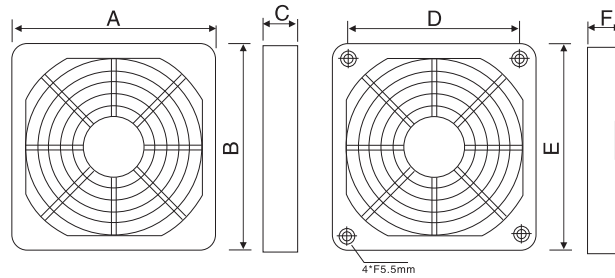


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J150FB-A	155	155	10	122	150	4.5

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J150YB-A


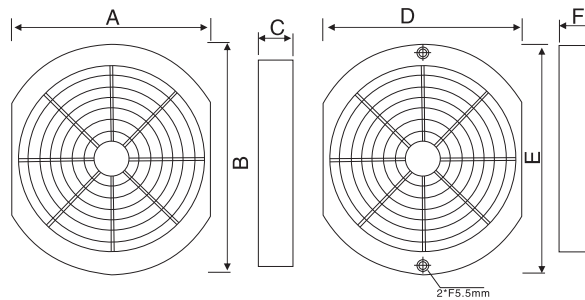


Size 尺寸(mm)	型号 Model	A	B	C	D	E	F
	YF-J150YB-A	155	177	10	150	162	4.5

Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40

YF-J200B-A(可配18060、20060)

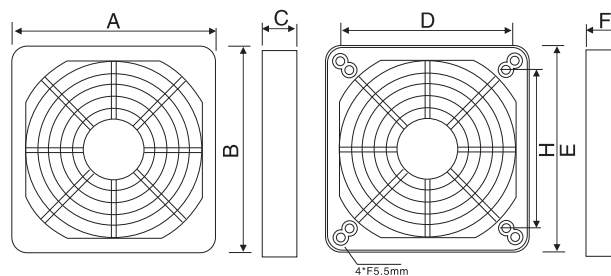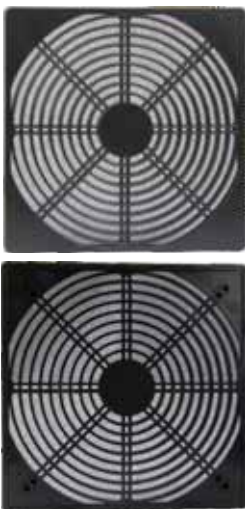

Size 尺寸(mm)	型号 Model	A	B	C	D	E	F	H
	YF-200H(B)	206	206	10	166	200	4.5	155


Technical requirement

1. Ventilation network material: Flame resistant ABS resin
2. Filter material: nylon fiber synthetic resin
3. Usage range: indoor $-10^{\circ}\text{C}\sim+55^{\circ}\text{C}$
4. Dust removal rate: 89%
5. Protection level: IP40


Metal shielding mesh

PART NUMBER CODE

YF - **G** - **80**

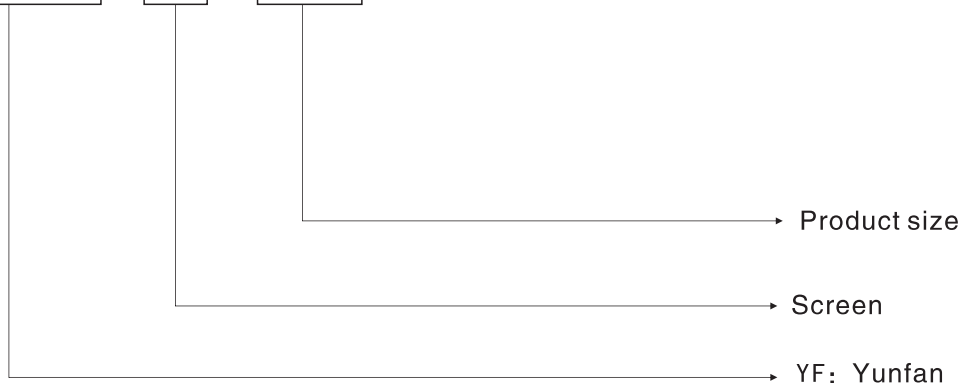

YF-G60

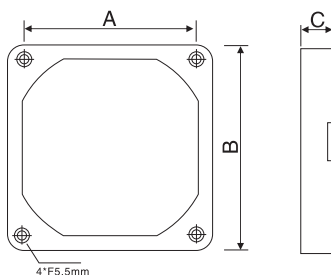


Technical requirement

Material of filter screen: 304 stainless wire mesh, formed in one piece by using an accurate stamping mould, with fabulous shape and functions including heat resistance and corrosion resistance. Dust removal rate: 89%.

Size 尺寸(mm)	型号 Model	A	B	C
YF-G60		50	60	3

YF-G80

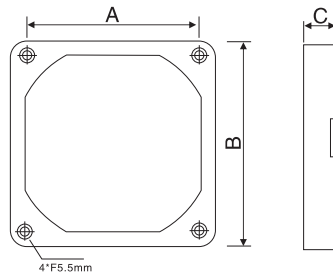


Technical requirement

Material of filter screen:304 stainless wire mesh, formed in one piece by using an accurate stamping mould,with fabulous shape and functions including heat resistance and corrosion resistance Dust removal rate:89%

Size 尺寸(mm)	型号 Model	A	B	C
YF-G80		71.5	80	3

YF-G92

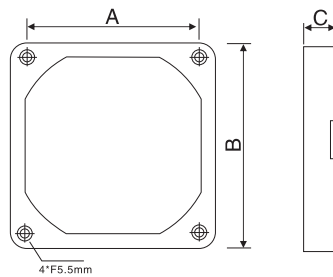


Technical requirement

Material of filter screen:304 stainless wire mesh, formed in one piece by using an accurate stamping mould,with fabulous shape and functions including heat resistance and corrosion resistance Dust removal rate:89%

Size 尺寸(mm)	型号 Model	A	B	C
YF-G92		82.5	92	3

YF-G120

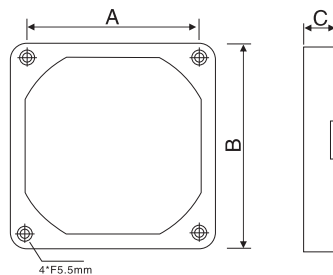

Technical requirement


Material of filter screen:304 stainless wire mesh, formed in one piece by using an accurate stamping mould,with fabulous shape and functions including heat resistance and corrosion resistance Dust removal rate:89%

Size 尺寸(mm)	型号 Model	A	B	C
YF-G120		105	120	3

YF-801




Size

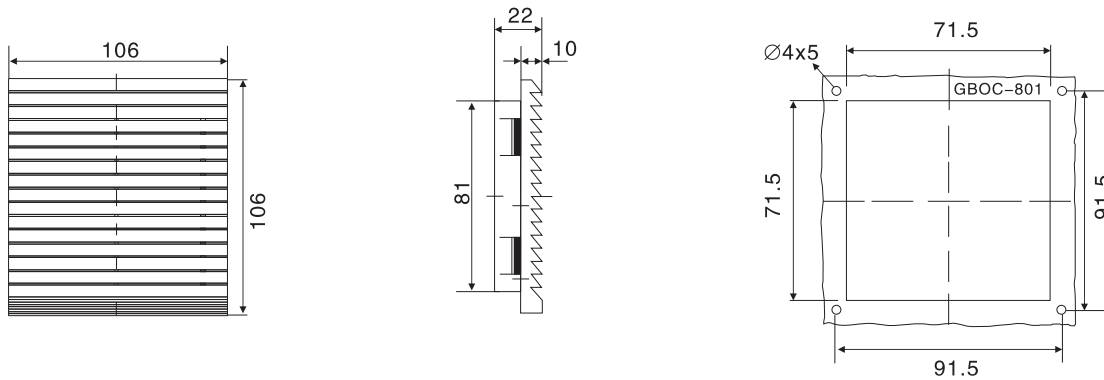

Technical requirement

风扇及过滤器Fan and filter型号YF	801.230	801.115	801.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	0.5/0.6m ³ /h(配YF 8038HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自起屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.08/0.07	0.16/0.14	0.27
功率 (W) Power(W)	13/11	6.4	
噪音水平dB (A) Noise level dB(A)	36/38		
工作环境温度 Operating ambient temperature	-10℃ 至 +55℃		
颜色Colour	RAL7035		
防护等级 IP code	用标准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 OC Outlet filter Model OC	9801.200		
配套风扇 Supporting fan	适用于 YF 8038HA2 使用 Applicable to YF8038HA2		


顶购颜色为RAL7032或其他色标形式时，请洽谈。如需特殊电压也可根据洽询提供，本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

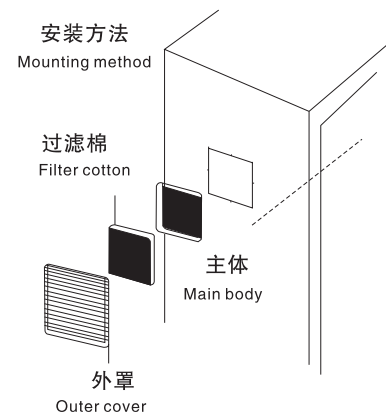

YF-802




Size

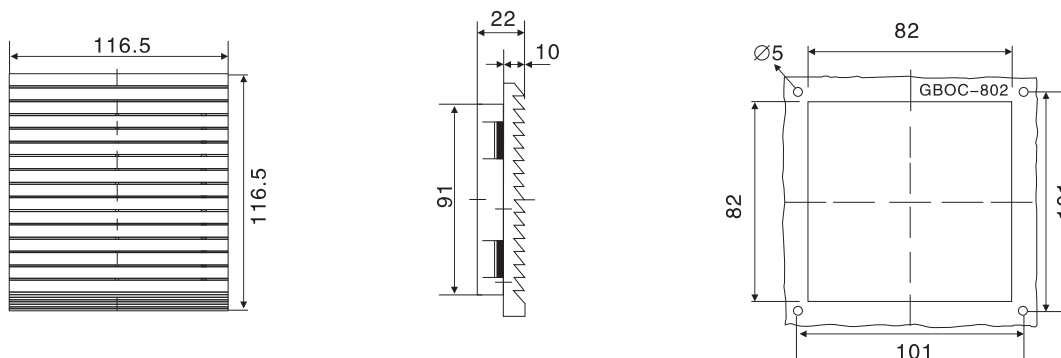

Technical requirement

风扇及过滤器Fan and filter型号OC	802.230	802.115	802.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	1.2/1.5 m ³ /h(配OC 9038HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自起动屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.07/0.06	0.12/0.15	0.38
功率 (W) Power(W)	16/17	9.1	
噪音水平dB (A) Noise level dB(A)	29/30		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用表准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 OC Outlet filter Model OC	9802.200		
配套风扇 Supporting fan	适用于OC 9038HA2 使用 Applicable to GB9038HA2		

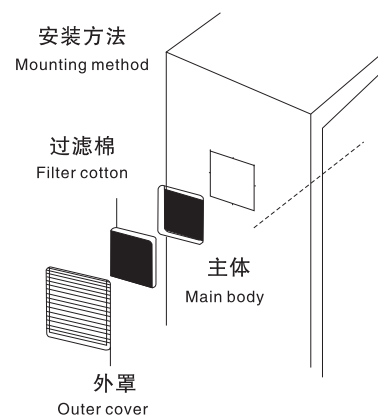


顶购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据咨询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

YF-803




Size

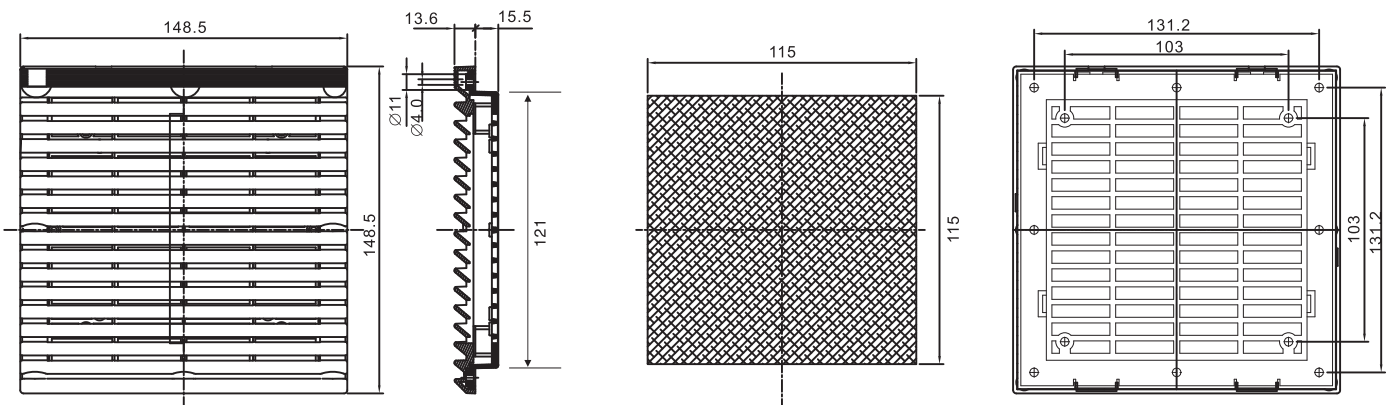

Technical requirement

风扇及过滤器Fan and filter型号YF	803.230	803.115	803.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	2.3/2.7 m ³ /h(配YF12038HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自起屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.14/0.13	0.28/0.26	0.22
功率 (W) Power(W)	21/25	5.3	
噪音水平dB (A) Noise level dB(A)	47/49		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用标准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9803.200		
配套风扇Supporting fan	适用于YF 12038HA2 使用 Applicable to YF12038HA2		

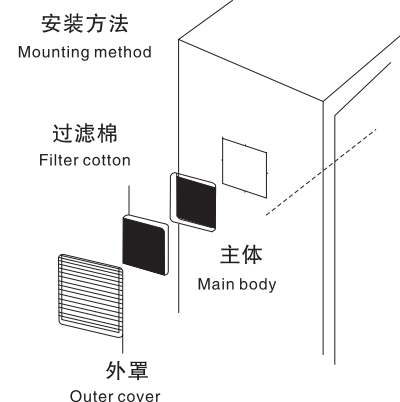


顶购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据洽询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

YF-804




Size

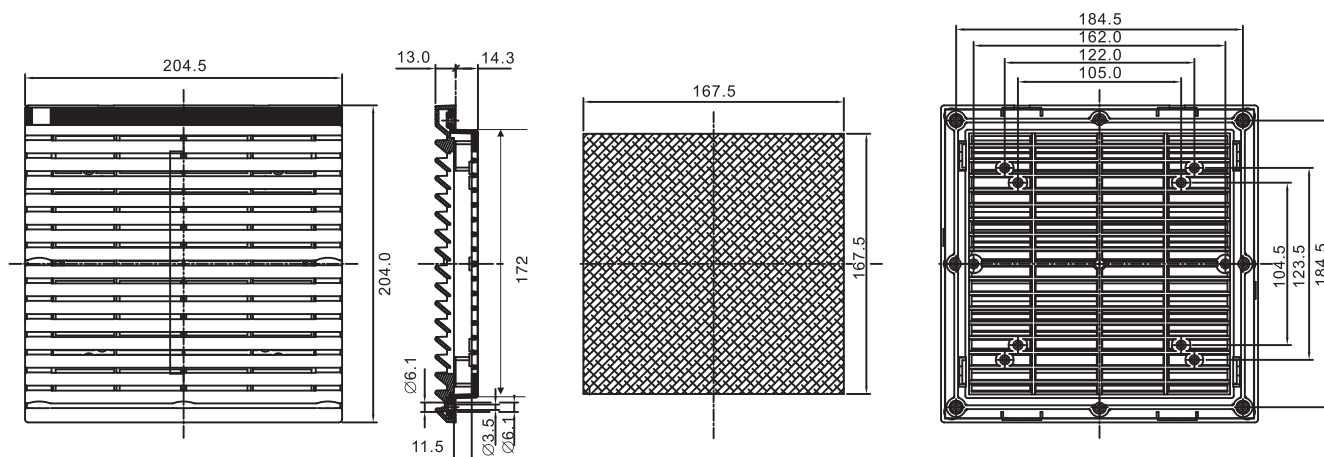

Technical requirement

风扇及过滤器 Fan and filter 型号 YF	804.230	804.115	804.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	5 m ³ /h (配 OC17250HA2 使用时)		
除尘率 Dust removal rate	86%		
轴流风扇 Axial fan	自起动屏蔽磁极电动机 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed (A)	0.25	0.5	0.5
功率 (W) Power (W)	38	5.3	
噪音水平 dB (A) Noise level dB (A)	55		
工作环境温度 Operating ambient temperature	-10°C 至 +55°C		
颜色 Colour	RAL7035		
防护等级 IP code	用标准过滤垫为 IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9804.200		
配套风扇 Supporting fan	适用于 Applicable to YF12038HA2 17250HA2 15050HA2 使用		

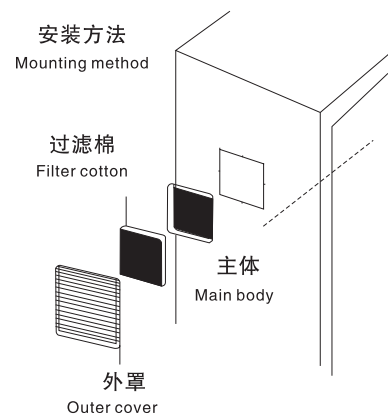


顶购颜色为RAL7032或其他色标形式时，请洽谈。如需特殊电压也可根据洽询提供，本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

YF-805




Size

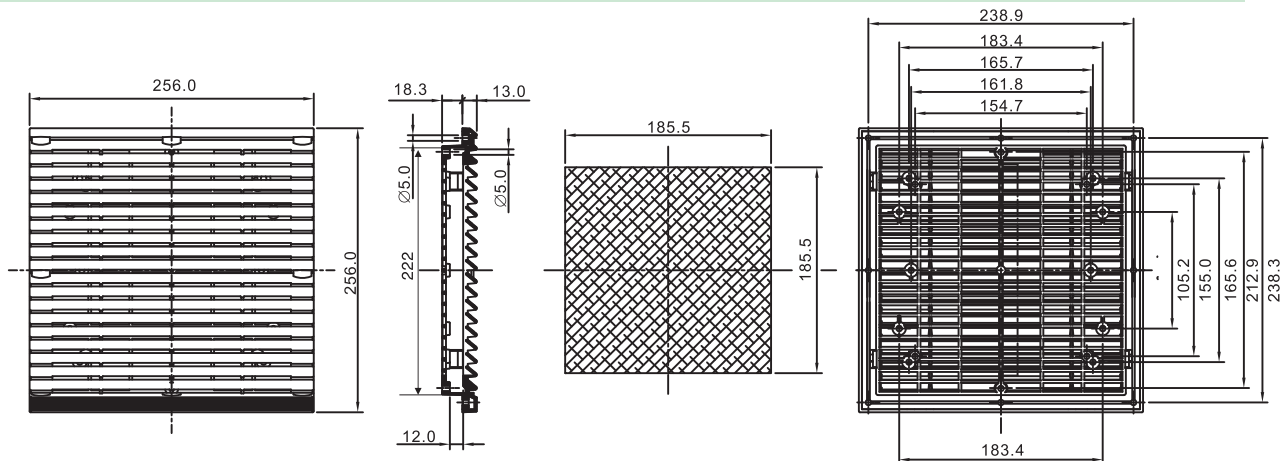

Technical requirement

风扇及过滤器Fan and filter型号YF	805.230	805.115	805.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	11 m ³ /h(配YF 22060HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自启动屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.35	0.70	1.50
功率 (W) Power(W)	65		36
噪音水平dB (A) Noise level dB(A)	60		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用标准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9805.200		
配套风扇Supporting fan	适用于Applicable to YF17250HA2 YF18060HA2 YF22060HA YF20060HA2 使用		

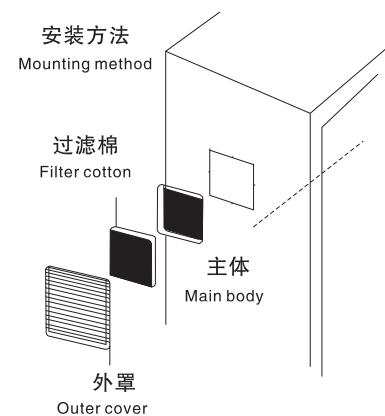


订购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据洽询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

YF-806




Size

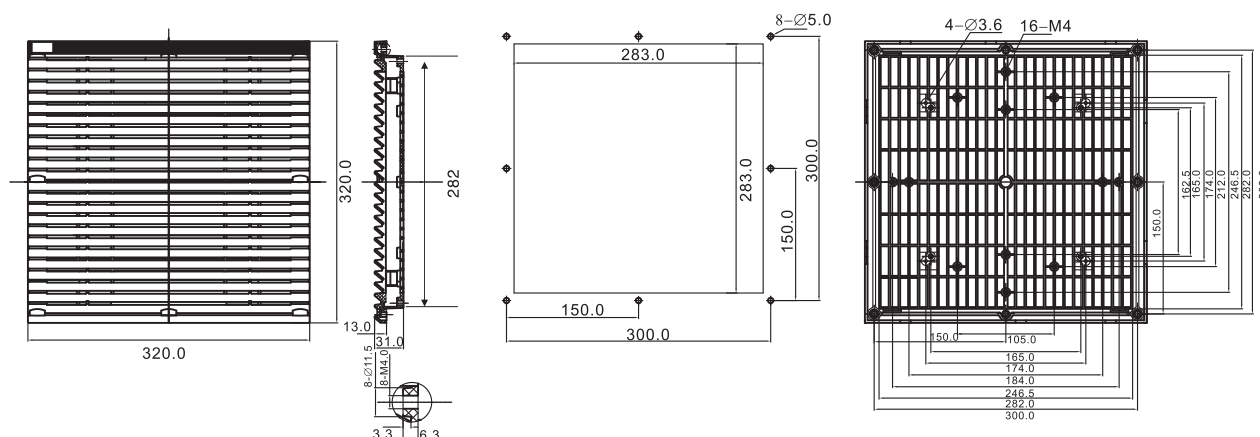


Technical requirement

风扇及过滤器Fan and filter型号YF	YF 806.230	806.115	806.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	25 m ³ /h(配YF 25489HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自启动屏蔽磁极电动	Automatically started shaded pole motor	直流电机 DC motor
设计电流 (A) Electric current designed(A)	0.45/0.60	1.0/1.1	2.10
功率 (W) Power(W)	70		57.6
噪音水平dB (A) Noise leve dB(A)	68		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用标准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9806.200		
配套风扇Supporting fan	适用于 Applicable to YF25489HA2 YF22060HA2 YF2207HB 使用		


顶购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据洽询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

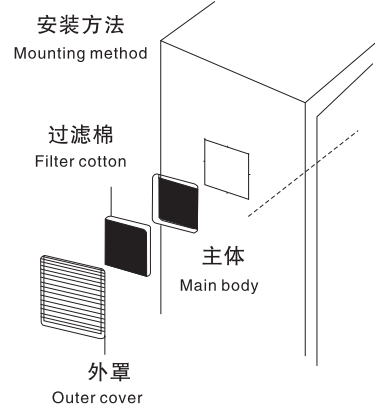

YF-807

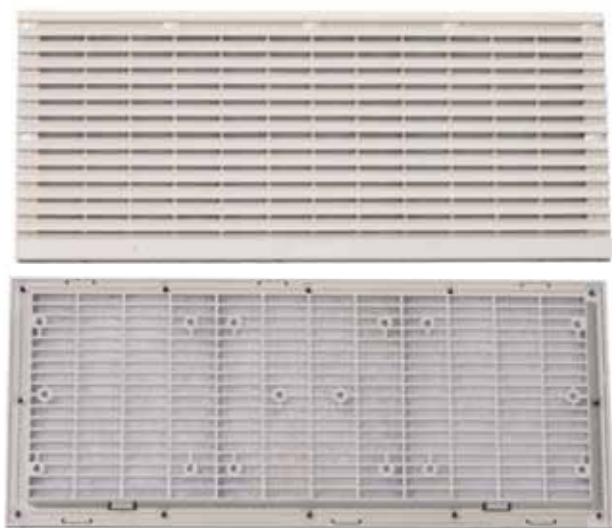


Size

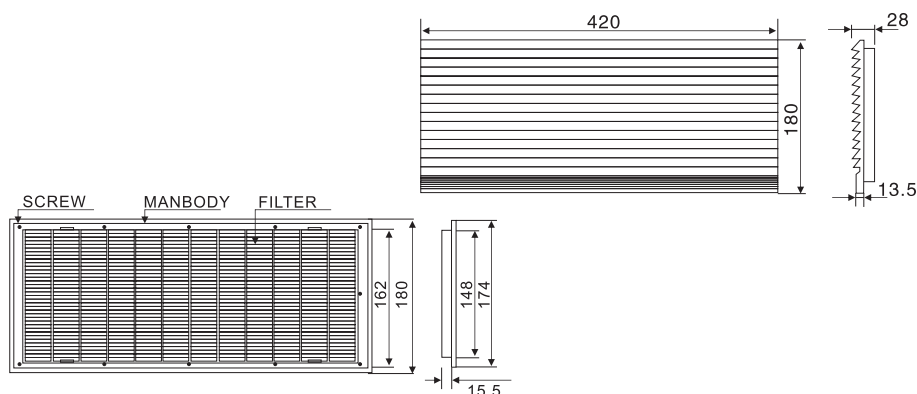

Technical requirement

风扇及过滤器Fan and filter型号YF	807.230	807.115	807.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	11 m ³ /h(配YF 22060HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自启动屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.35	0.70	1.50
功率 (W) Power(W)	65	36	
噪音水平dB (A) Noise leve dB(A)	60		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用表准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9807.200		
配套风扇Supporting fan	适用于Applicable to YF17250HA2 YF12038HA2 使用		

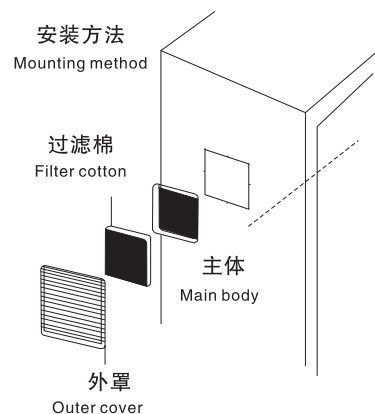


顶购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据洽询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

YF-808




Size

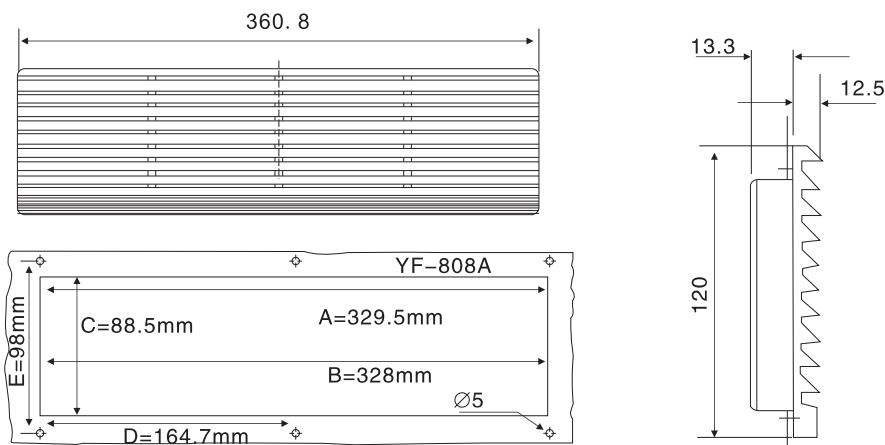

Technical requirement

风扇及过滤器Fan and filter型号YF	YF 808.230	808.115	808.024
设计工作电压 (V/Hz) Designed operating voltage	230.50/60	115.50/60	24
空气流量 自由吹风 Airflow, free wind	25 m ³ /h(配YF 25489HA2 使用时)		
除尘率Dust removal rate	86%		
轴流风扇 Axial fan	自启动屏蔽磁极电动 Automatically started shaded pole motor	直流电机 DC motor	
设计电流 (A) Electric current designed(A)	0.45/0.60	1.0/1.1	2.10
功率 (W) Power(W)	70	57.6	
噪音水平dB (A) Noise level dB(A)	68		
工作环境温度 Operating ambient temperature	-10℃ 至+55℃		
颜色Colour	RAL7035		
防护等级 IP code	用标准过滤垫为IP44 Ip44 while using standard filter mat		
出口过滤器 型号 YF Outlet filter Model YF	9808.200		
配套风扇 Supporting fan	适用于 Applicable to YF25489HA2 YF22060HA2 YF2207HB 使用		

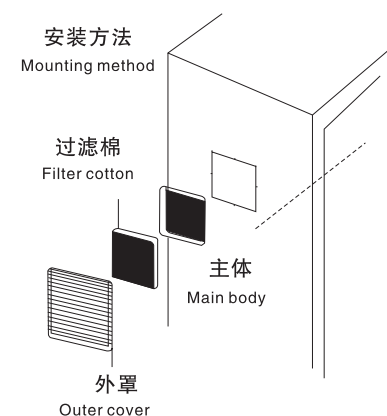

顶购颜色为RAL7032或其他色标形式时, 请洽谈。如需特殊电压也可根据洽询提供, 本公司保留技术改动权利。
Please consult with us when the colour ordered is RAL 7032 or others. Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.



YUNFANPOWER

SHENZHEN YUNFAN POWER CO.,LIMITED

Address:No.6 huangan south Rd,Junzibu,Guanlan,Longhua new district, Shenzhen, China.(518110)

Factory: No.11 Yuxie Road,Qingxi Town,Dongguan City,Guangdong Province,China(523648)

Phone:0086-13480187585 (Wechat / WhatsApp)

<http://www.yunfanpower.com>

<http://www.yunfanpower.en.alibaba.com>

Email:black@yunfanpower.com OR info@yunfanpower.com

Skype:blackvip1000